

High-Efficiency Self-Centering Pipe Cutting and Beveling Machine

Adopt high strength & precision ring structure, apply for pipe cutting and beveling, especially for batch working of cutting & beveling

Adopt METABO motor: low noise, long life, stable performance and perfect speed adjustable function, with CE certificate.


YouTube



How High-Efficiency is it?

Dia. 63.5 x 6mm
Material X65
Time take **51 seconds** only !!!

METABO Motor Specification:
Model: BEV 1300-2
230V -50/60 HZ 1300W 6.0A
N 3300r/Min (rpm)
Made in Germany

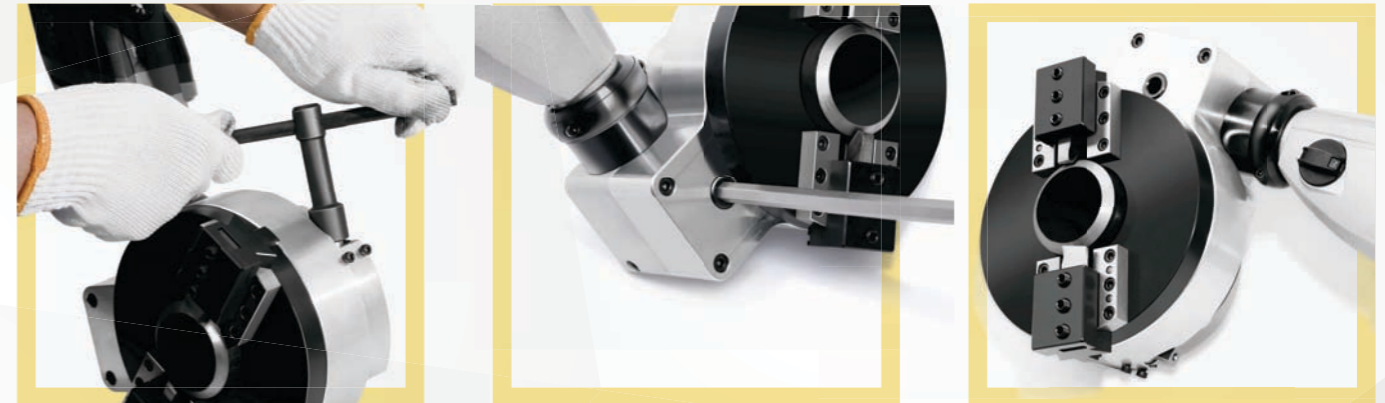

Specification

| Model | AK-63E | AK-63P |
|-------------------|----------------------|-----------------|
| Driven | Electric | Pneumatic |
| Power Supply | 220-230V 1PH 50/60HZ | 900L/Min@0.6Mpa |
| Motor Power | 1300W | 1HP |
| Working Range(OD) | 14-63mm | 14-63mm |
| Wall Thickness | ≤15mm | ≤15mm |
| Rotation Speed | 60-80RPM | 45-60RPM |
| Working Weight | 13kgs | 13.5kgs |
| Shipping Weight | 20kgs | 21kgs |
| Packing Size | 570*470*220mm | |



Features

- Self-centering, make the installation much faster
- Compact structure and good appearance, high strength aluminum body
- Adopt new synchronous feeding mechanism, feeding uniformity, tool bits has longer working life
- Easy set-up, operation and maintain
- Cutting & beveling finished at same time, high working efficiency
- Cold working, no spark, won't make the material affected
- Perfect working precision, no burrs
- Well-adapted, you can make the speed adjust depend on the working conditions

Tooling Chart

| Description | Part No. | Application | Sketch |
|---------------------------------|----------------|--|--------|
| M42 Cutting tool 4x18x65mm | 42C-0465 | Standard cutting, for most materials up to 20mm wall thickness. | |
| M42 Beveling tool 12x12x65mm | 42B-1265-30° | Standard beveling, for most materials up to 16mm wall thickness. | |
| | 42B-1265-37.5° | | |